

Drop-in anchor HKD-SR



Base materials

- Concrete (cracked)

Applications

- For medium-duty loads with anchor bolts and threaded rods, e.g. suspension systems for pipes, air ducts, sprinkler systems etc.
- For redundant fastening applications in cracked concrete or single-point applications in uncracked concrete

Advantages

- Stainless steel for corrosion protection
- Features a lip for flush setting, regardless of hole depth
- Visual check for correct setting when used with the Hilti setting tool


Technical data

Head configuration	Inner thread
Material composition	Steel, A4 (SS316)
PROFIS	Yes
Suitable for cracked concrete with redundant fastenings	Yes

Approvals

ETA	ETA-02/0032 for HKD (ETAG 001-04, Option 7)
	ETA-06/0047 for HKD (ETAG 001-06, Option -)

Approvals and test reports may apply to selected products only. Please refer to the documents for details.

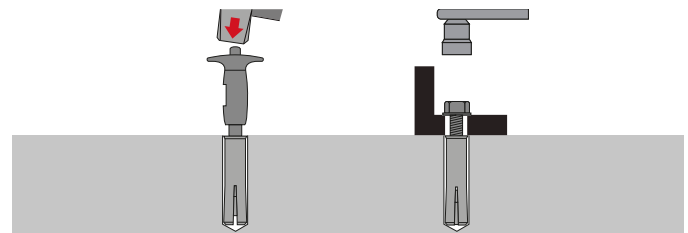

These are abbreviated instructions which may vary by application. Always review/follow the instructions accompanying the product or refer to www.hilti.com/techlib.

Ordering designation	Drill bit diameter	Drilling depth	Internal thread size	Useable thread length	Max. tightening torque	Packaging	Anchor length	Sales pack quantity	Item number
HKD-SR M6X25	8 mm	27 mm	6 mm	12 mm	4 Nm	Box	25 mm	100 pc	247951
HKD-SR M8X30	10 mm	33 mm	8 mm	15 mm	8 Nm	Box	30 mm	100 pc	247952
HKD-SR M10X40	12 mm	44 mm	10 mm	18 mm	15 Nm	Box	40 mm	50 pc	247953
HKD-SR M12X50	15 mm	54 mm	12 mm	22 mm	35 Nm	Box	50 mm	50 pc	247954
HKD-SR M16X65	20 mm	70 mm	16 mm	31 mm	60 Nm	Box	65 mm	25 pc	247955 ¹⁾
HKD-SR M20X80	25 mm	85 mm	20 mm	42 mm	120 Nm	Box	80 mm	25 pc	247956 ¹⁾

¹⁾ This is a non-stock item. For detailed lead time information please contact your Hilti representative.

Please visit our website for the latest item numbers and related products.