

Sleeve anchor (closed eyebolt) HLC-EC



Base materials


- Concrete (uncracked)
- Masonry (solid)

Advantages

- Pre-assembled anchor for fast, easy installation
- Eyelet version
- Ideal for through-fastening applications

Technical data

Material composition	Steel, zinc-plated (min. 5 µm)
Head configuration	Closed eye bolt

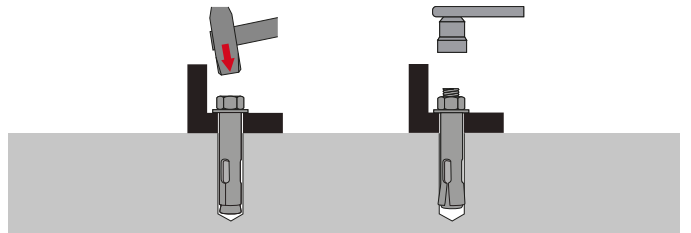

These are abbreviated instructions which may vary by application. Always review/follow the instructions accompanying the product or refer to www.hilti.com/techlib.

Ordering designation	Anchor size	Drill bit diameter	Anchor length	Required tightening torque	Base plate clearance hole	Sales pack quantity	Item number
HLC-EC 8x40	8 mm	8 mm	40 mm	8 Nm	10 mm	50 pc	385871¹⁾
HLC-EC 16x100	16 mm	16 mm	100 mm	50 Nm	18 mm	10 pc	385873¹⁾

¹⁾ This is a non-stock item. For detailed lead time information please contact your Hilti representative.

Please visit our website for the latest item numbers and related products.