

Heavy-duty expansion anchor HSL-GR



Base materials

- Concrete (uncracked)

Applications

- Heavy-duty fastenings in safety-relevant applications and corrosive environments, e.g. pumps, heavy equipment, antennas, heavy pipe supports, medical equipment, etc.

Advantages


- High tensile and shear load capacity
- Force-controlled expansion
- Wide range of sizes for a variety of applications

Technical data

Material composition	Steel, A4 (SS316)
Head configuration	Externally threaded
PROFIS	Yes

Ordering designation	Anchor size	Anchor length	Base plate clearance hole	Required tightening torque	Wrench size	Sales pack quantity	Item number
HSLGR M8/20	M8	102 mm	14 mm	25 Nm	13 mm	40 pc	67920¹⁾
HSLGR M10/20	M10	115 mm	17 mm	40 Nm	17 mm	20 pc	67922¹⁾
HSLGR M12/25	M12	139 mm	20 mm	80 Nm	19 mm	20 pc	67924¹⁾
HSLGR M16/25	M16	163 mm	26 mm	120 Nm	24 mm	10 pc	67926¹⁾
HSLGR M20/30	M20	190 mm	31 mm	200 Nm	30 mm	6 pc	67928¹⁾

¹⁾ This is a non-stock item. For detailed lead time information please contact your Hilti representative.

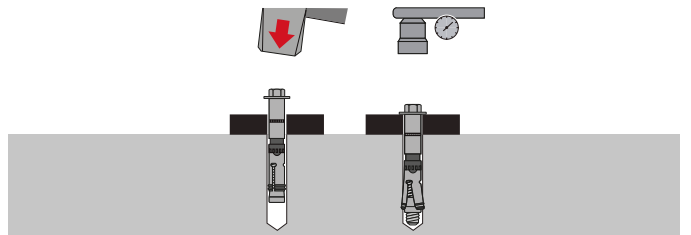

These are abbreviated instructions which may vary by application. Always review/follow the instructions accompanying the product or refer to www.hilti.com/techlib.

Please visit our website for the latest item numbers and related products.